SPARTHERM®
The Fire Company

FUORA Q | FUORA R

Flexibility to enjoy your outdoor fire at any particular occasion

For further information www.spartherm.com

Product description FUORA Q / FUORA R

Usage

The use of FUORA Q / R gas fireplaces is for outdoor areas only.

Product description

- The powder-coated pedestal body has an ideal height for the firelight, and it furthermore has space for an 11 kg LPG gas cylinder.
- The gas storage allows atmospheric flickering flames for a period of more than 36 hours.
- Due to easy installation and handling, the FUORA Q / R can be put quickly and effectively into operation.
- The 2 rollers at the bottom of the device allow an easy and comfortable movement.
- Practical recessed grip enable the handling of this high-quality fireplace.
- For a perfect fire, you can adjusted the height of the flames according to your preferences.

FUORA Q

Glass lid with stainless steel brackets

Burning chamber including lava stones

Insight into the open base with connected gas bottle

Colours

Nero

White

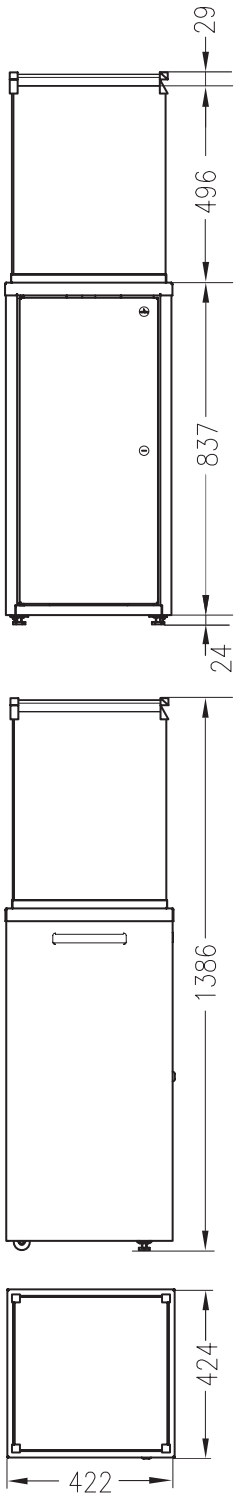

Technical details FUORA Q / FUORA R

Operation	With and without glass top
Gas connection	Standard for liquid 5+11 kg gas bottles
Safety	Stall prevention security, pilot light, thermoelectric gas control
Performance	
Nominal heat output	3-7 kW
Pre preasure	50 mbar
Fuel / consumption volume	G30 / G31 / ~ 0,2 m³/h
Fuel	Butane / Propane
Size and weight measurement (WxHxD)	FUORA Q: 422 x 1386 x 424 mm FUORA R: 400 x 1390 mm

Glass measurements (WxHxD)	FUORA Q: 381 x 495 x 381 mm FUORA R: 400 x 500 mm
Weight	FUORA Q: 31 kg | FUORA R: 42 kg
Equipment	
Outer casing	Burner bed with lava stones
Delivery	Gas control valve, gas pressure setting → ready for connection to standard liquid gas bottles
Execution	Substructure powder-coated, Colours: Nero or White
Fulfilled requirements	EN 14543 + A1

FUORA R

Burning chamber including lava stones

Practical recessed grip

Fuora R with cover

Colours

Nero

White

Cover

Heat resistant with glass lid

Burning chamber

Large open panorama view of the flame pattern

Base material

Durable powder-coated aluminium corpus

Base

Lockable cover door for the gas cylinder

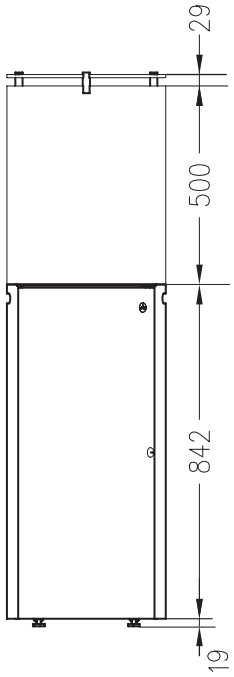

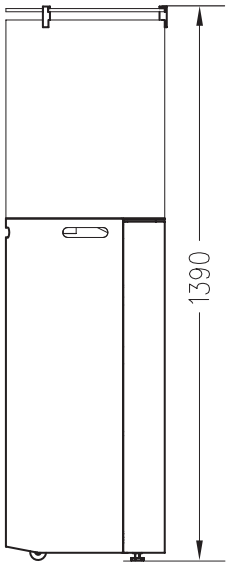



FUORA Q | FUORA R

Flexible enjoyment of the fire for special occasions

Your dealer

Do you have any questions or requests?
SPARTHERM is there for you.

SPARTHERM®
The Fire Company

SPARTHERM Feuerungstechnik GmbH · Maschweg 38 · D-49324 Melle · Tel. +49 (0) 5422-9441-0 · Fax +49 (0) 5422-9441-14 · info@spartherm.com · www.spartherm.com

Subject to technical changes.
A1-GB-SP-0.000/07/2016-DC